



# 36CH H.264+ NVR Mega Pixel Standalone R-36A





- Support 32~36ch. IP Camera input. H.264+ and H.264 decoder
- Dual stream structure. Support 5MP IP camera live view and recording
- 8pcs HDD slot inside. Support software raid 0,1,5
- External extension port : e-sata HDD bay and USB storage
- USB port can plug in USB joystick. Support PTZ, focus control, channel switch, and user defined function
- Support Afidus IP cam (including IVA function and fisheye control). Support ONVIF 2.0 or above IP cameras
- 2U NVR dimension. Rack mount bracket (optional accessory)
- Free bundle 256ch. CMS software for multi NVR management
- Support Smart Phone and Tablet PC.

<b>Model</b>	36CH NVR
<b>SoC</b>	ARM Cortex A17 4 core + ARM Cortex A7
<b>LAN Port</b>	1 x Giga RJ-45 Ethernet port
<b>Video Output</b>	VGA D-sub + HDMI
<b>Audio Input</b>	MIC x 1 (phone jack 3.5mm)
<b>Audio Output</b>	Phone Jack 3.5mm x 1
<b>HDD</b>	SATA HDD Up to 6TB x 8
<b>E-SATA</b>	E-SATA x 1
<b>Raid</b>	Raid 0, 1, 5 ( Raid: optional )
<b>Backup</b>	USB Mass Storage
<b>LED Indicator</b>	System Ready, HDD R/W, LANx1 , Record Schedule x1 , Event Schedule x1, Alarm x1 , Camera status x1, DI x4 , DO x4
<b>USB</b>	USB 2.0 x2 (for mouse or joystick) USB 3.0 x1 (for mass storage)
<b>Sensor In / Alarm Out</b>	4 Digital in / 4 Digital out
<b>Button</b>	Factory Default Reset
<b>H/W WDT</b>	H/W Watch Dog
<b>RTC</b>	RTC
<b>Buzzer</b>	1 Buzzer
<b>Power</b>	Internal Power Supply, AC100-240V/in
<b>Temperature</b>	0~40°C
<b>Humidity</b>	0%~85% R.H
<b>Housing</b>	8 HDD version
<b>Rack mount</b>	Rack mount bracket (optional)
<b>Certification</b>	CE, FCC
<b>Support Cameras</b>	Up to 36CH at H.264+ Mode Up to 32CH at Mix Mode
<b>Video Codec</b>	H.264+ / H.264
<b>Audio Codec</b>	G.726 / G. 711
<b>Resolutions</b>	QVGA / VGA / SXGA / FULL HD / 3M /5M
<b>Audio</b>	● Volume adjustable / Mute ● Two way audio
<b>Live Preview</b>	● Support 1 / 4 / 9 / 16 / 25 / 32 / 36 ● Full-screen ● Snapshot ● Selectable display cameras
<b>Digital Zoom /ePTZ</b>	Google earth like digital zoom
<b>PTZ</b>	● Support PTZ cameras: PTZ / Preset / Tour / Auto pan / Add and Go to preset ● Iris control/ Remote Focus (Afidus smart focus IP cam) ● Fisheye IP cam e-PTZ control, Original/ Panorama/Region control (Afidus fisheye IP cam) ● Support USB joy sticker. ● Control PTZ camera by joy sticker
<b>Record</b>	● Schedule recording each camera ● Round the clock / motion record modes / DI detection / Event trigger ● Pre-alarm / Post-alarm configuration ● Auto recycle record files by HDD spaces
<b>Record Device</b>	● 8 x SATA Internal HDD ● 1 x e-SATA ● Samba path support
<b>Playback</b>	● 1 /4/ 9/ 16 /25 / 32 Division ● Full-screen ● Graphical interface ● Play / Reverse / Pause / Seek / Pre- I frame / Next Frame ● Speeds: 1/4 , 1/2 , 1 , 2 , 4 , 8 , 16 , 32 ● Volume control ● Convert to AVI ● Multi-Cameras Period Backup

<b>Multi-Language</b>	● Multi-language selectable ● English / Traditional Chinese / German / Greece / Tai (welcome request)
<b>Event Detection</b>	● Motion / DI / Disconnect / HDD / Schedule trigger ● Schedule-able Event Detection ● From Afidus IP camera events: Cross line, face detection, audio detection, camera tampering
<b>Alarm</b>	Buzzer / DO / Display on Screen (editable OSD text) Start to record / Snapshot / Send video to E-Mail FTP server / Send notify to TCP , HTTP server
<b>Notification</b>	● SMTP / HTTP / FTP / TCP/ Mobile phone push notify ● Address Book management
<b>User authentications</b>	● User management ● Function permissions: Selectable privilege management
<b>Camera setting</b>	● DVR like(auto setting) ● Auto Search ● Profile selectable
<b>Schedule setting</b>	● Graphical interface ● Weekly schedule
<b>Network</b>	Fix IP / DHCP / PPPOE / DIPS Report / UPNP transversal
<b>System time</b>	● Manual setting ● NTP support ● DST support
<b>Motion detection</b>	● Detection windows setting (Max 10 windows) ● Sensitivity adjust
<b>Snapshot</b>	● Preview snapshot in HDD or Remove-able device ● Search Event Snapshot ● Backup snapshot to remove-able device
<b>Disk Management</b>	● Partition management ● Format partition ● Samba management ● Raid inside (optional)
<b>Maintenance</b>	● Resolution selectable , 1024x768 / 1280x1024 / 1366x768 / 1440x900 / 1920x1080 ● Display style select-able, Normal / Simple / Professional / Advance ● Screen adjustment, Brightness / Contrast / Saturation / Hue ● Reset default ● Backup / Restore setting ● Firmware upgrade ● System Restart
<b>Remote</b>	● Support IE, ● Fully function remote live preview ● Fully function remote playback ● Support low bit-rate connection with live preview and playback ● Selectable camera connection
<b>Free Bundle CMS</b>	● 256 channel IP Cam live view ● PC Windows base software ● Multi-monitors function: Remote live preview / playback / event management/ Map ● Google map™ and map picture. Multi-layer map ● Special support Afidus IP cam "Smart focus ", " Fisheye e-PTZ", "Fisheye O/P/R view angle change", "Intelligent event trigger: object detection, cross line, face detection, audio detection" ● TV Wall function
<b>Free Bundle Smart Phone Apps</b>	● Afidus App for Android and I-Phone. ● NVR group setup. 4channel live view ● Record video to local phone. ● Playback video from local phone and from IP cam mSD card (remote retrieve) ● Send video to Google drive™ or YouTube™ (welcome request other storage server)

※ The product design and dimensions may change without previous notice for improvement of performance.

## Dimensions

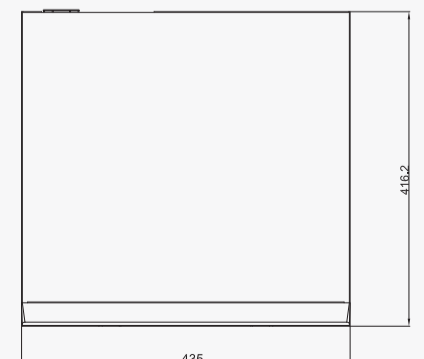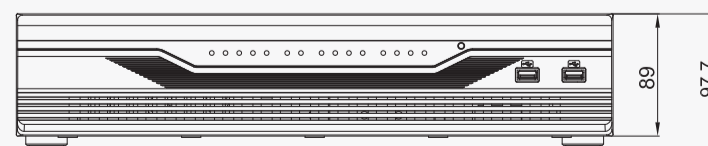

Company Name : Afidus Ltd.

Company Address : 7F-4, No. 186, Jian 1st Rd., Zhonghe Dist.,  
New Taipei City 235, Taiwan (R.O.C)

Company Website : www.afidus.com

TEL : +886-2-8226-9857 FAX : +886-2-8226-9800

Distributed by :

